



Single - Phase Digital Wattmeter Connection

Key Features

This wattmeter can be used for AC power, AC/DC voltage and current measurements.

Power

V Input	0 - 600 V AC
Frequency	45 - 65 Hz

Range	Accuracy	Resolution
2000 W	+-(1.5% + 1d)	1 W
6000 W	+-(1.5% + 1d)	10 W

Voltage


Frequency	45 - 65 Hz
Impedance	1 MΩ

Range	Accuracy	Resolution
200 AC/DC	+-(0.8% + 1d)	0.1 V
750 AC (1000 DC)	+-(0.8% + 1d)	1 V

Current

Frequency	45 - 65 Hz
-----------	------------

Range	Accuracy	Resolution
10 AC/DC	+-(1% + 1d)	10 mA

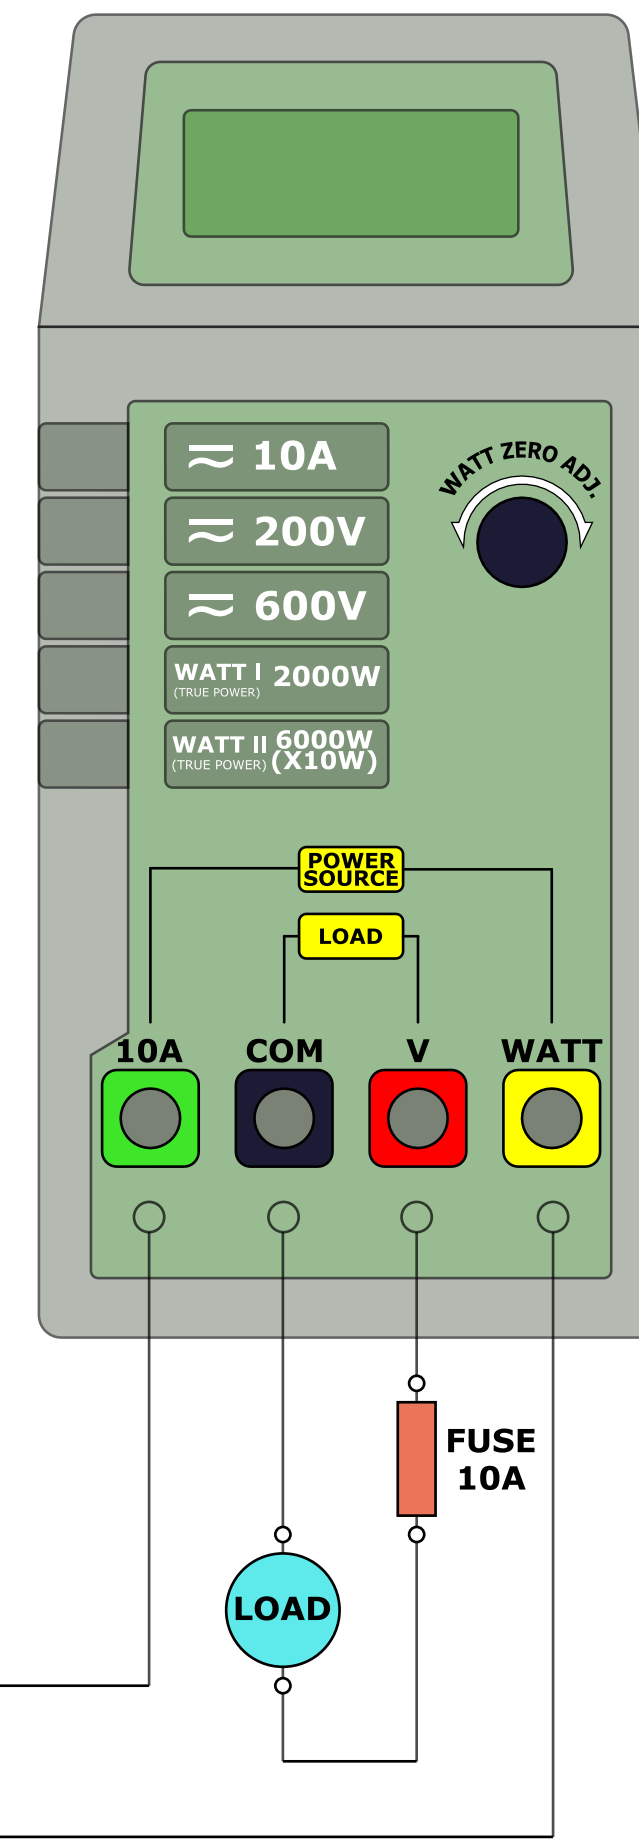

MAX. 500V AC/DC
10 A